## Solids Handling Improvement Project

**Update** 


November 9, 2016



## Solids Handling Project Objectives

- Provide value for ratepayers
- Increase solids handling capability to meet 2040 sludge production
- Continue to produce Class B biosolids for beneficial land application
- Provide capability to upgrade from Class B biosolids to Class A biosolids with no stranded investment
- Potential options to produce/enhance revenue
  - Digester gas utilization
  - Septage receiving

## Process Flow Diagram

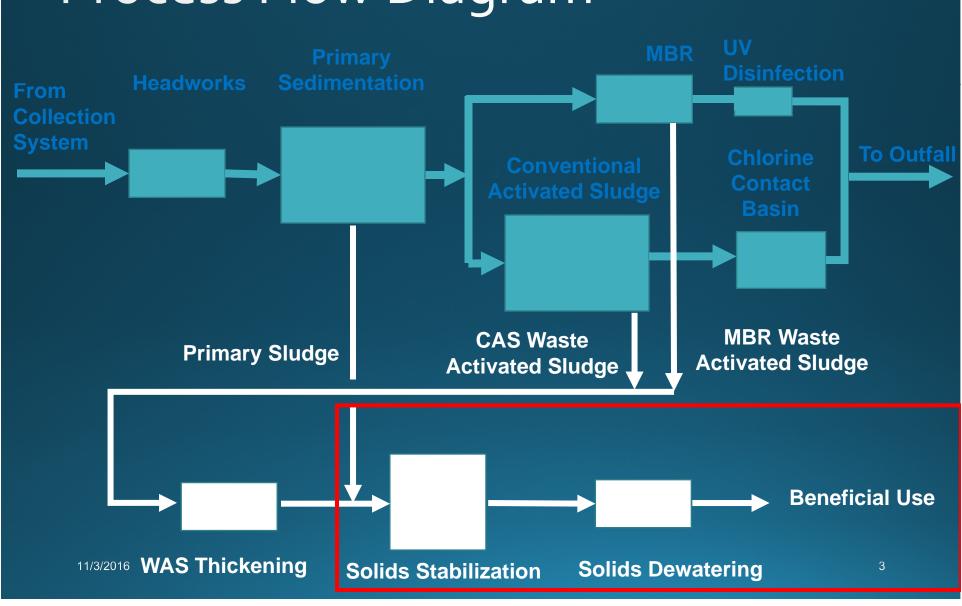


Facility	2007 Master Plan	New Approach (Phased)	Purpose	
Digesters	2	Phase 1 – 1 by 2020 Phase 2 – 1 by 2030	Capacity	
Digester Control Building			Capacity	
Sludge Blending Tank			Operation	
Solids Handling Facilities		Phase 1 – Improve existing building, add to digester control building	Condition/Capacity	
Truck Loadout and Cake Storage			Odor control/Operation	
Centrifuges		Phase 1 — Replace equipment to allow extended operation Phase 2 — Add equipment	Capacity	
Centrate Equalization		Phase 2, if required	Capacity	
Emergency Power			Reliability	
Relocate Electrical Gear		Reliability		
Combined Heat/Power		Separate project with funding opportunities		

Originally Proposed Project — 2007 Master Plan

Digester Control Bldg.


**New Digesters** 

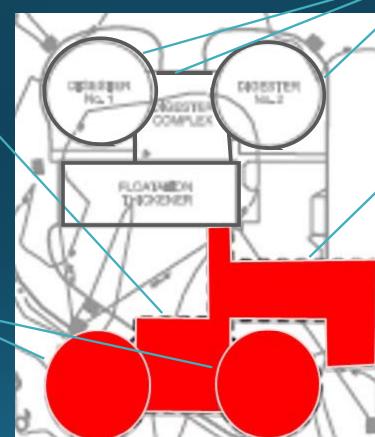


Existing
Digesters and
Control Building

New Solids Bldg. and Truck Load-Out

# Phase 1 to be Constructed by 2020

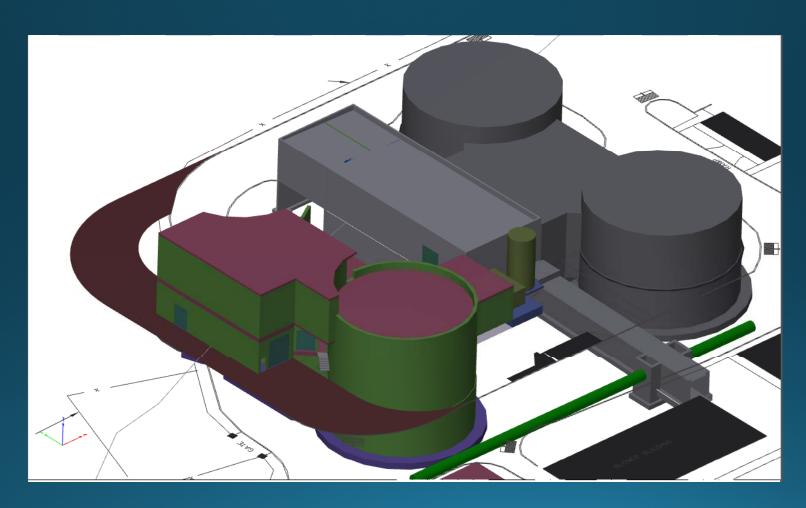

# Costs are Refined as Design Progresses

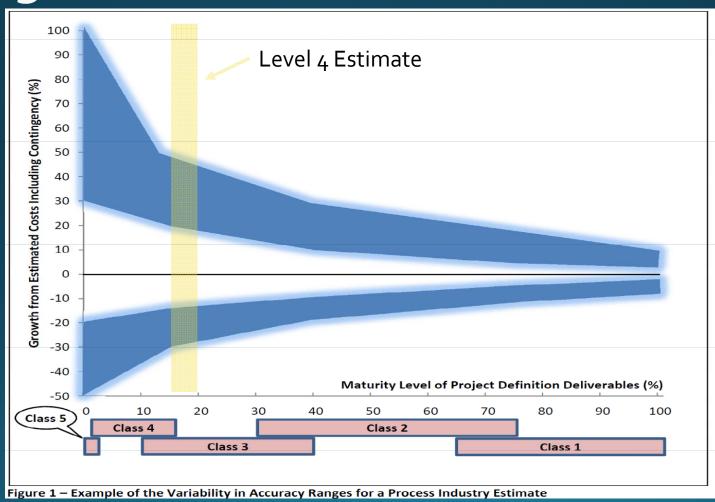

## Basis of Construction Cost Estimate – Mark Ups


ltem	Mark Up
General Conditions	6%
Overhead and Profit	15%
Contingency (Level 4)	25%

WES Internal Costs (Engineering, Legal, Admin) – 25%


# Phasing Reduces Initial (2020) Construction Cost

Facility	Purpose	Estimated Const. Cost, \$M	
Digester and Control Building	Capacity Expansion	12.3	
Sludge Blending Tank	Operational Improvement	2.0	
Solids Handling Facilities	Capacity Expansion	4.3	
Truck Loadout and Cake Storage	Odor Control and Operational Improvement	4.2	
Refurbish Existing Solids Facilities	Condition/Reliability	4.4	
Emergency Power	Reliability	0.3	
Power Distribution	Capacity/Reliability/Condition	3.4	
Total		30.9	


# Estimated 2020 Construction Cost by Purpose

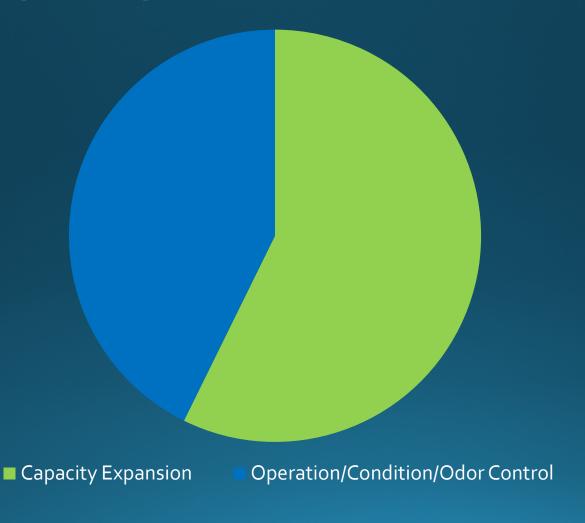

## Rigorous Evaluation and Phasing Reduces Construction Cost

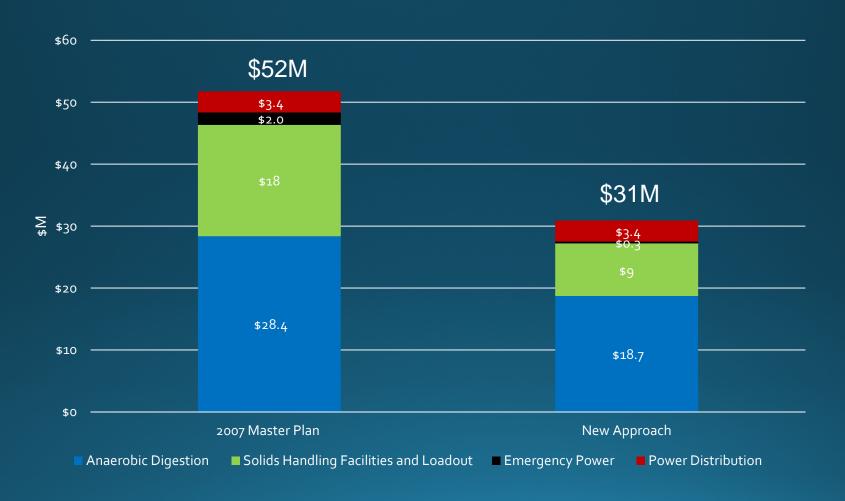

## Next Steps and Schedule

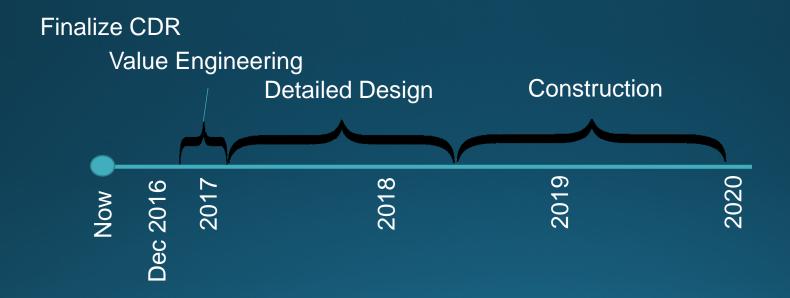

### **Questions and Discussion**

## Regional Wastewater Treatment Capacity Advisory Committee



November 9, 2016



#### **How are Capital Intensive Projects Financed?**

- Equity contributions to the project from the service districts (via reserves and free cash flow)
- Long term debt helps manage future rate increases (at current interest rates, a dollar of debt proceeds translates into 6 cents to annual revenue requirements from rates)




## Updated Cost and Projected Cash Flow Requirements for the Solids Handling Project

» Costs through FY 15-16

\$354,526

» Future costs FY 16-17 through FY 20-21

\$37,500,000

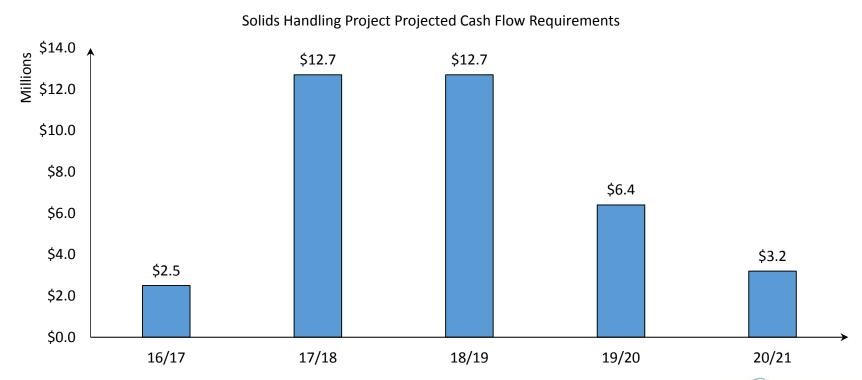



## An Effective Funding Strategy for the Project Clean Water State Revolving Loan Fund

#### Financing Assumptions:

Current future cost of the Solids Handling Project (uninflated)	\$ 37,500,000
less: equity contributions from the service districts	18,750,000
Balance to be funded from DEQ CWSRF loan	\$ 18,750,000

#### Financing assumptions:

Funding source: DEQ Clean Water SRF

Loan type: Design/Construction

Start date for loan servicing 1-Jul-21

Repayment term (years) 20

Interest rates:

Interest rate 1.79%

Administration fee <u>0.50%</u>

Total 2.29%

Imputed total level debt service \$ 1,179,029




#### **Estimated Monthly Rate Impacts**

Monthly	y Rate∃	<b>Impacts</b>
---------	---------	----------------

		CCSD 1		TC	CSD
			delta from base		delta from base
CCSD 1	TCSD	by increment	case	by increment	case
50%	50%	\$ 0.92	(\$0.26)	\$ 1.45	\$0.41
64%	36%	\$ 1.18	\$ -	\$ 1.05	\$ -
70%	30%	\$1.29	\$ 0.11	\$ 0.87	(\$0.17)
75%	25%	\$ 1.38	\$ 0.20	\$ 0.73	(\$0.32)
80%	20%	\$ 1.47	\$ 0.29	\$ 0.58	(\$0.47)
85%	15%	\$ 1.57	\$ 0.39	\$ 0.44	(\$0.61)
90%	10%	\$ 1.66	\$ 0.48	\$ 0.29	(\$0.76)
95%	5%	\$ 1.75	\$ 0.57	\$ 0.15	(\$0.90)
100%	0%	\$ 1.84	\$ 0.66	\$ -	(\$1.05)



#### **Estimated Monthly Rate Impact**

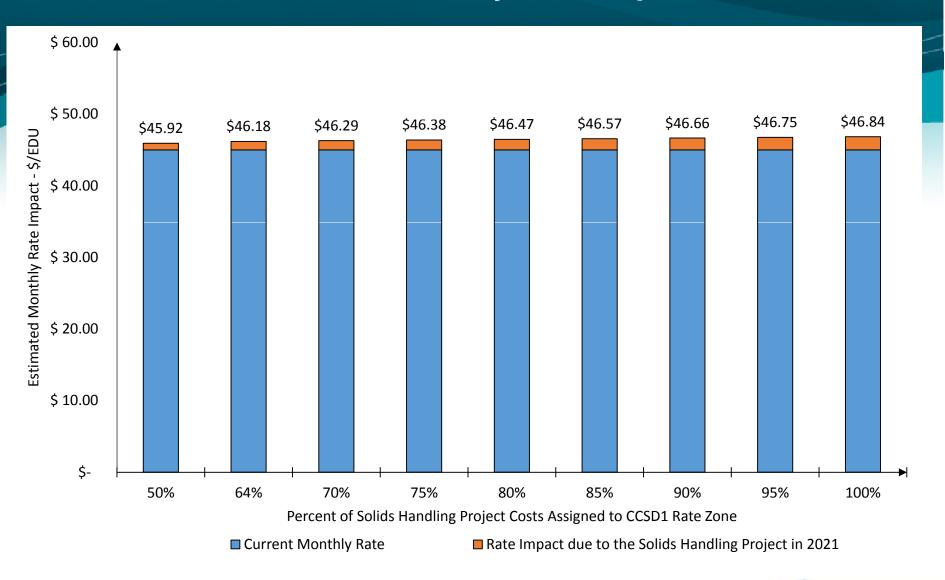




#### **Estimated Monthly Rate Impact**





#### **Estimated Monthly Rate Impacts - Continued**

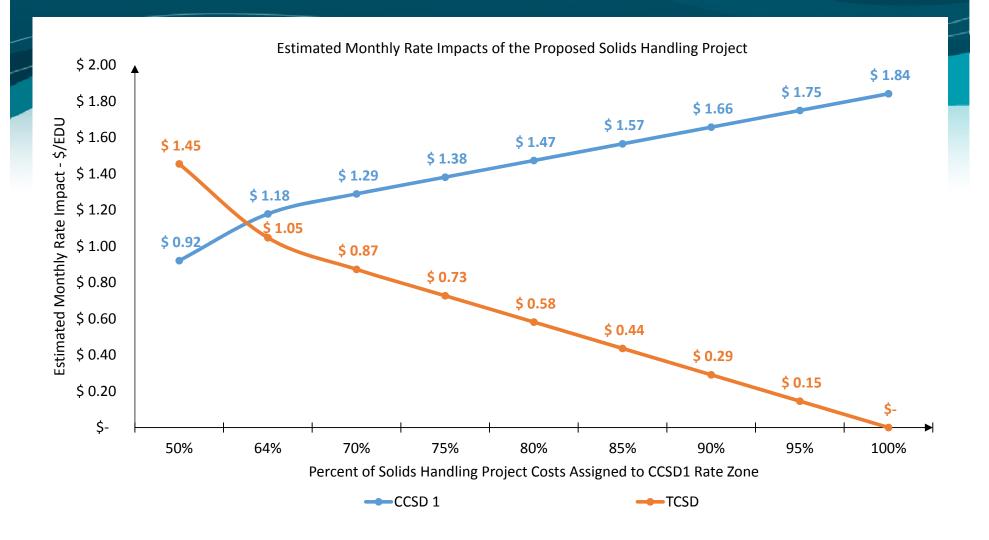



#### Conclusions

- » WES engineering team reduced the cost of the solids handling project (\$56.4m down to \$37.5m)
- » WES is in a financial position to cash finance 50% of the cost of the project (\$18.75m)
- » Based on the base case cost allocation of 64% to CCSD1 and 36% to Tri-City Rate Zones, the rate impacts are:
  - \$1.18 per EDU per month to CCSD1 rate zone
  - \$1.05 per EDU per month to Tri-City rate zone



### **Questions and Discussion**